

It's OK to be shallow.

An affordable, low-profile LED panel
that "fits" your needs.



RAB[®]
LIGHTING
RABWEB.COM • 888-722-1000

Edge-Lit LED Panels



- Ultra efficient, up to 130 lm/W
- Perfect for shallow plenums
- Even and diffuse ambient illumination, ideal for spaces where glare-free lighting is required
- Offered in two sizes and three wattages: 2x2 (30W and 40W) and 2x4 (40W and 50W)
- 0-10V dimmable driver, standard
- Available with factory-installed Lightcloud™ lighting control system Controller



It's OK to be shallow.

With a height just under 2", the EZPAN is an ideal solution for shallow plenums.



No #!\$%*@ glare.

Diffused, white opalescent lens delivers even, glare-free light that's ideal for healthcare facilities, educational facilities and computer workspaces.



Secure installation...to a T.


Integral T-bar clips secure the EZPAN to standard T-bar systems.

Stay in control.

All EZPAN models are available with an optional, factory-installed Lightcloud™ Controller (*see back page for details*).




Lumen output and efficiency

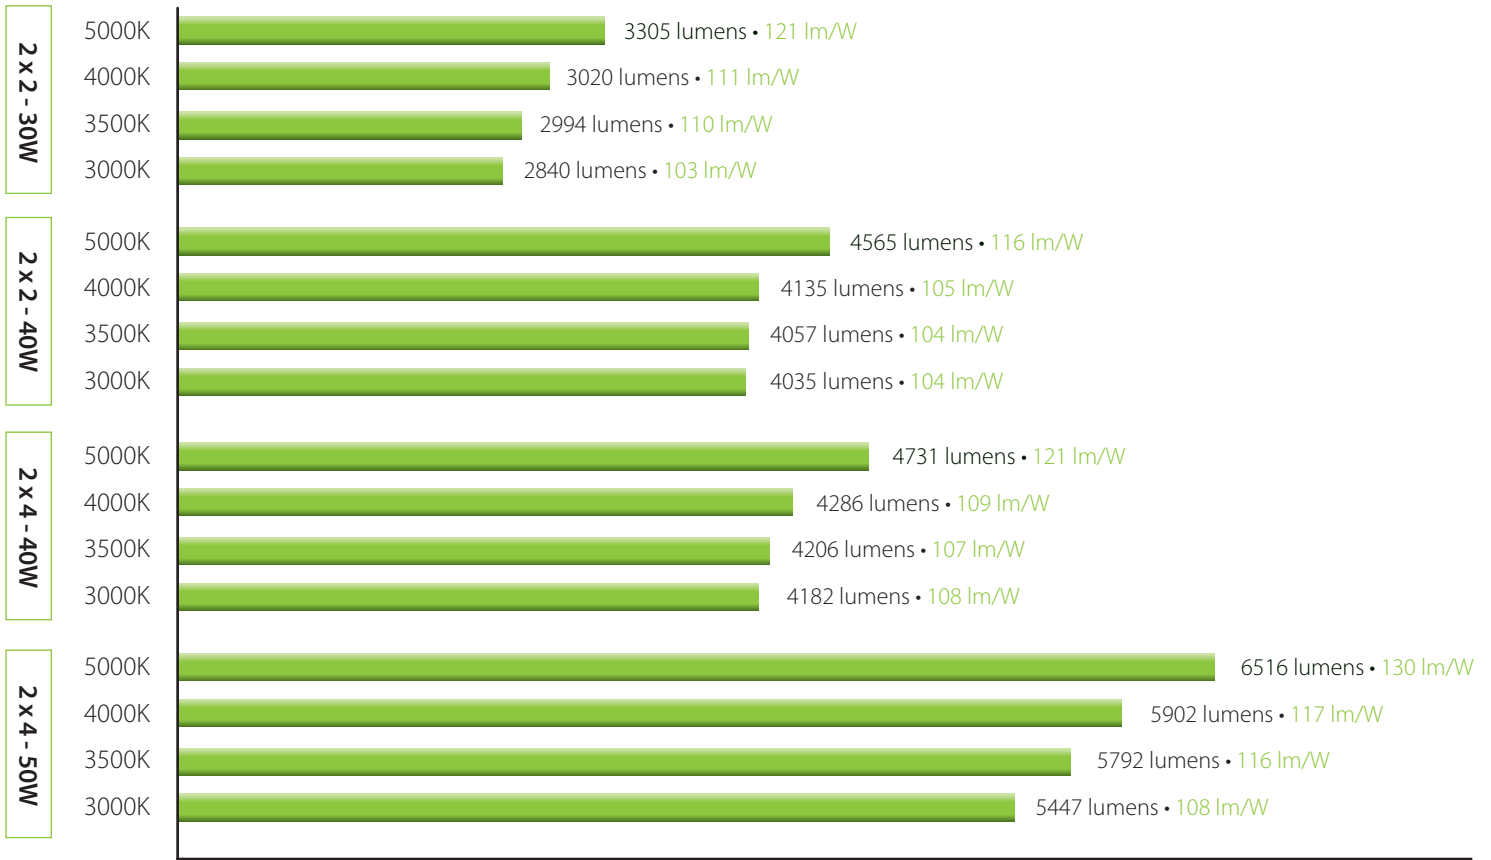


Dimensions and weight

Weight: 26.4 lbs

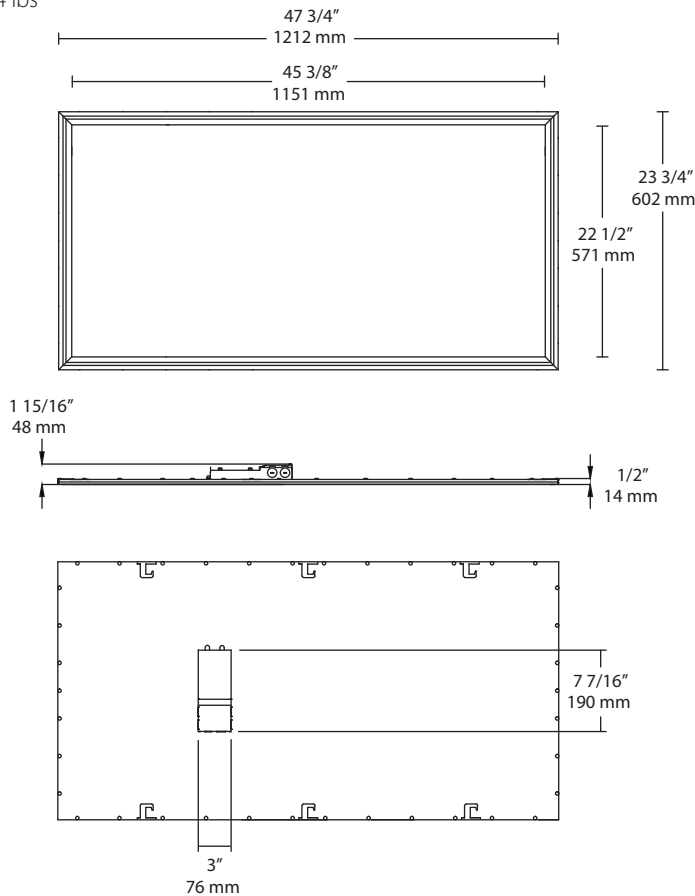

Weight: 13.2 lbs

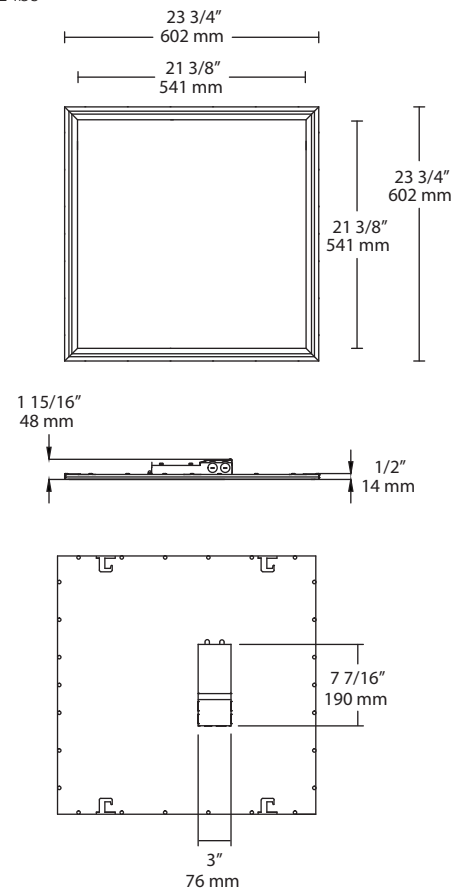

Specifications

UL Listing: Suitable for damp locations

IC Rating: Suitable for insulated ceilings

LEDs: Long-life, high-efficiency surface mount LEDs

Driver:

30W (2x2): 50/60 Hz., 120V: 0.23A; 208V: 0.16A; 240V: 0.14 A; 277V: 0.11A, PF >90%, THD <15%

40W (2x2 and 2x4): 50/60 Hz., 120V: 0.33A; 208V: 0.21A; 240V: 0.19A; 277V: 0.16A, PF >90%, THD <15%

50W (2x4): 50/60 Hz., 120V: 0.43A; 208V: 0.24A; 240V: 0.22A; 277V: 0.20A, PF >90%, THD <15%

Dimming: 0-10V dimmable driver, standard

Ambient Temperature: Suitable for use in 40°C (104°F) ambient temperatures

Housing: Lightweight aluminum housing, steel pan and junction box

Lens: Frosted polystyrene

Installation: Standard integral T-bar clips secure the fixture to T-bars and prevent T-system separation.

Finish: Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contain no VOC or toxic heavy metals.

Green Technology: Mercury and UV free, and RoHS compliant.

Ordering information

Product Family	Size	Wattage	Color Temperature	Dimming (standard)	Options
EZPAN				/D10	
	2X2 2' x 2' 2X4 2' x 4'	30 30W (2' x 2') 40 40W (2' x 2' or 2' x 4') 50 50W (2' x 4')	Blank 5000K N 4000K YN 3500K Y 3000K	/D10 0-10V Dimming	/LC Lightcloud Controller /E2 Emergency battery backup

EZPAN is available with Lightcloud.

Lightcloud™ is a professional-grade wireless lighting control system, fully developed and supported by RAB.

- Save up to 68% on energy costs from lighting
- Use your mobile device, tablet or computer for switching and dimming of individual fixtures or entire areas
- Programmable schedules let you illuminate a zone only when needed, automatically adjusting for sunrise and sunset times
- Complimentary rebate assistance and lighting design services



Contact RAB at 888 722-1000 for a quote or visit rabweb.com.

RAB®